

Model 3P - Specifications




STANDARD CURRENT RANGES:

A.C. Amps, RMS

0-50, 0-100, 0-150

MAX WEIGHT: 9 OZ.

- Accommodates up to 5000 V Cable Voltage
- Extended Temp. Range
- Light Weight
- Encapsulated Shock Resistance
- Small Size
- Metal Encased
- Isolated Two-Wire Transmitters
- Fast, Reliable Response
- Low Cost Industrial Monitor
- Current Overload Protection
- Never Requires Calibration
- Complete Electrical Isolation
- Single Supply Voltage
- Supply Reversal Protection

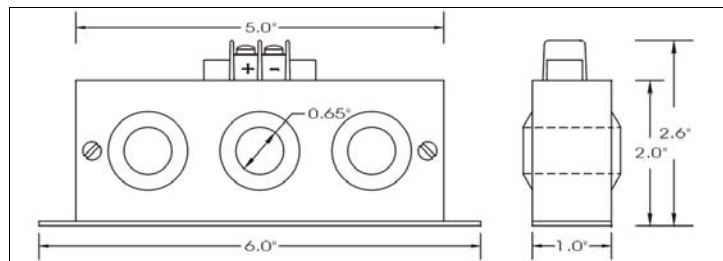

PERFORMANCE SPECIFICATION


With Optimum Load Resistance

| | |
|-------------------------|--------------------------|
| Accuracy | 0.2% (Standard) |
| Repeatability | 0.1% Full Scale |
| Response Time | 150 Milliseconds Maximum |
| Temperature Range | -25 deg. C to 85 deg. C |
| Temperature Coefficient | 0.04% F.S./ deg. C |
| Conductor Cable Voltage | 5000 Volts |
| Supply Voltage | 5 to 40 V.D.C. |
| Signal Out | 4 to 20 mA |
| Frequency | Nominal 50 / 60 Hz |

CONNECTION SPECIFICATION

| | |
|---------------------------|------------------|
| Conductor Cable Size | Up To 0.65" dia. |
| Wire Range - Top Terminal | 14 to 22 AWG |
| Dielectric Withstand | 16 KV / mm |

CHARACTERISTIC CURVE

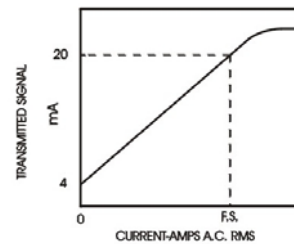


OPTIMUM LOAD RESISTANCE

The optimum load resistance is actually the sum of the line resistance, receiver resistances and added external load resistance. However, in many applications, the line resistance and receiver resistances are negligible in comparison to the added external load resistance. The following equation may apply:

$$R_L = (V_S - 5) \times 40$$

Where: R_L = Load Resistance in Ohms.

V_S = Supply Voltage in Volts D.C.

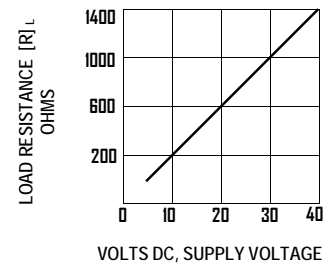

Manufacturer maintains right to change specifications without notice; prices as of January 1, 2008.